

Rosengrens RSB30A


Cash-in for automated and secure deposit of money



Rosengrens RSB30A is a 24 hour cash-in-system for business customers to bank their daily takings or for bank clients to deposit surplus cash into their account. It is a simple and fast deposit system, which can be configured to suit different locations and applications. The cash-in system can be placed in the pavement, in the bank lobby, off-site or in a shopping centre. Apart from the convenient and fast deposit procedures a unique feature is the full audit confirming that a deposit has been made. In addition an automated registration system makes the collection procedure extremely fast and accurate. The RSB30A is based on the Atlantic safe that is tested according to the European norm EN 1143-1.

Rosengrens RSB30A

Cash-in for automated and secure deposit of money

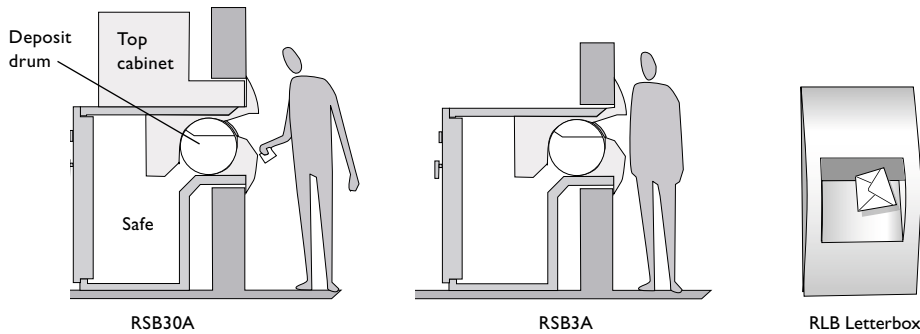

Product data					
Model	Outer dimensions			Volume (lit)	Weight (kgs)
	Height	Depth	Width		
Front frame	735	105	590		
Top cabinet	545	575	640		90
Safe A1*	1135	700**	640	165	840
Safe A1b*	1200	700**	640	165	860
Safe A2*	1295	620**	750	220	940

* Based on the Atlantic safe ** Additional 350 mm for the deposit "nose"

Deposit and information alternatives	
Magnetic card reader:	For business customers - activated through the enrol procedure.
Display LCD & pin pad:	Selected by each user during the enrol procedure. By entering the PIN on the keyboard the RSB30A recognises the user and opens for deposit.
Receipt printer:	Receipt with branch, date/time, amount and barcode number. Issued per deposit or bulk of deposits. Paper roll with 1300 receipts.
Internal barcode reader:	Addition to the front reader; to recognise the barcode of the sealed bag deposited into the safe.
Hand scanner:	For fast registration of collected sealed bags.
Log printer:	For printing of demanded information on command.

Deposit: The deposit procedure of RSB30A is fast, simple and secure. A green light indicates "Open" at distance. Correct identification will immediately open for depositing. The deposit opening is made with a barcode on the sealed bag which immediately opens for deposit by presenting the sealed bag in the RSB30A front. Immediately a deposit has been made a receipt is issued with real time information, customer, barcode and amount. The barcode and date/time are stored in the database as deposit verification. Configuration alternatives to open for deposits are PIN-code or magnetic card or in combination with the barcode system. RSB30A has two different levels of verification – photocell sensing is included in all systems to recognise that an item is deposited into the safe and barcode reader – additional to the front reader; to recognise the barcode of the sealed bag deposited into the safe.

RSB3A is a slimmed RSB30A without the top cabinet. The deposit access is by code. Option is photo sensor and operation panel – to show number of deposits. Front and safe is identical with RSB30A. RSB3A can later be upgraded to RSB30A.

RLB Letterbox can be installed separately or in combination with RSB30A, having the same front design. Letter opening can be 5 x 280 or 40 x 280 mm. There are two cabinet sizes available.

Collection: The 15" monitor situated at the rear of the top cabinet of RSB30A guides you through the collection procedure starting with the authorised identification by the bank or a CIT company. Using the barcode option the collected deposits are registered by means of a hand scanner followed by a printed collection list. By this automated registration system the collection procedure is extremely fast and accurate, and deviation lists between the deposits registered in and out are immediately available from the RSB30A database, locally or centrally.

PC-system/network: The RSB30A includes a complete PC system for controlling and running the deposit and collection procedures. This enables you to enrol new users, search for information from the database and set parameters of the system. RSB30A can directly be connected to the network. The network facility enables early control of incoming cash, to optimise the collection frequency and to have remote access to the RSB30A database.

Burglary protection: The RSB30A is based on the Atlantic safe tested according to the European norm EN 1143-1 and certified by ECB+S in grade III. The highly resistant security material for the safe enables reduction of the wall thickness and thereby considerably reduces the weight. The safe is prepared for base fixing.

Modern design: The modern front frame has integrated illumination and incorporates the latest industrial design. Both coloured in RAL9002 or 9006 and stainless steel fronts are available.

Rosengrens International Coordinating Center
 Box 450, SE-792 27 Mora, Sweden
 Tel +46 250 56 78 00, Fax +46 250 56 78 90
 E-mail rosengrens.international@rosengrens.com
www.rosengrens.com

Member of the Gunnebo security group